

2025-2026



YOUR BEST BUSINESS PARTNER for
THE BEST PERFORMANCE
IMPULSE TOOLS

◆ **INNOVATION** ◆ **RESEARCH**
◆ **DESIGN** ◆ **QUALITY**



IMPULSE TOOLS



Manufacturer & Exporter
AIRPRO INDUSTRY CORP.



Table Contents



Shut-Off Pistol Type Air Impulse Wrenches & Screwdrivers
自動斷氣式槍型油壓脈衝工具 & 螺絲起子

01



Shut-Off Straight Type Air Impulse Wrenches & Screwdrivers
自動斷氣式直型油壓脈衝工具 & 螺絲起子

04



Shut-Off Angle Type Air Impulse Wrenches & Screwdrivers
自動斷氣式彎頭油壓脈衝工具 & 螺絲起子

05



Non Shut-Off Pistol Type Air Impulse Wrenches & Screwdrivers
失速式槍型油壓脈衝工具 & 螺絲起子

06



Non Shut-Off Straight Type Air Impulse Wrenches & Screwdrivers
失速式直型油壓脈衝工具 & 螺絲起子

07



Non Shut-Off Angle Type Air Impulse Wrenches & Screwdrivers
失速式槍型 & 直型油壓脈衝工具 & 螺絲起子

08




Digital Torque Testers , Vacuum Pump Systems & Parts For Maintenances
數位式扭力測試機、抽真空系統 & 零件維修組


09

Industrial Impulse Tools

Peak of tool fastening in aspect of high precision automatic air shut-off.
Impulse tool with high precision, high efficiency, and excellent duration.

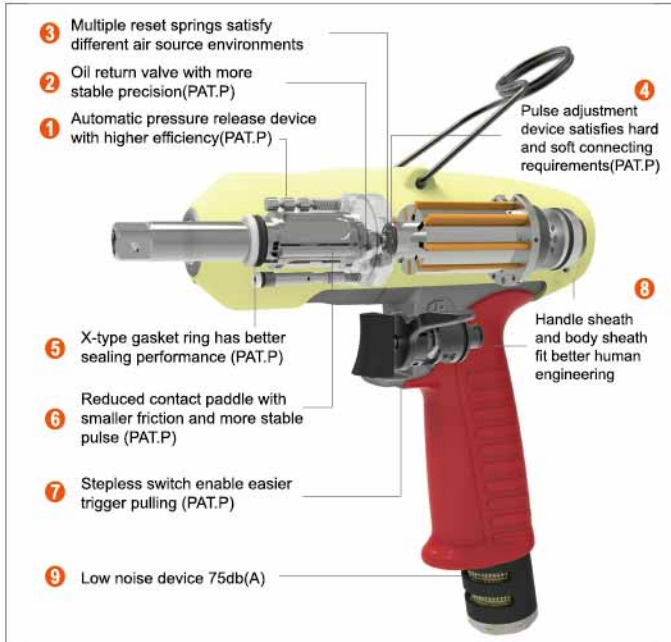


Double Cylinder Motor W/ High Efficiency Motor

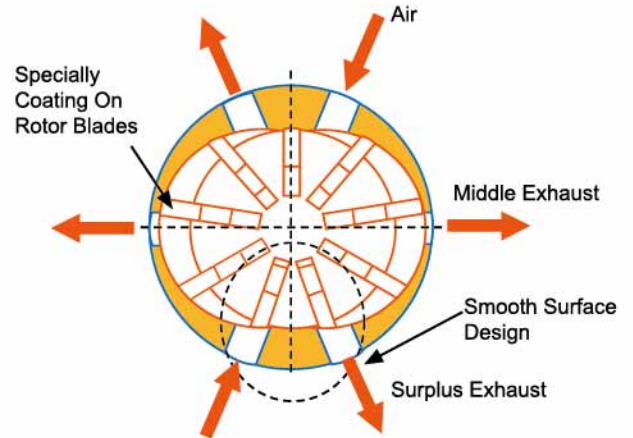


- 1- New designed eco-saving air motor
- 2- Specially coating on rotor blades.
- 3- Middle exhaust. 4- Smooth surface design.
- 5- Surplus exhaust.

Point Contact Type (cylinder for use in a high-pressure tool)

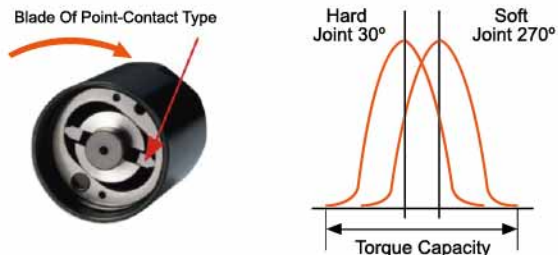

The blades do not cause a resistance due to a great contact point when a torque of a largescale tool is raised. The point contact type blade makes the torque more quickly and accurately raised.

Double-Needle Type (cylinder for use in a low-pressure tool)

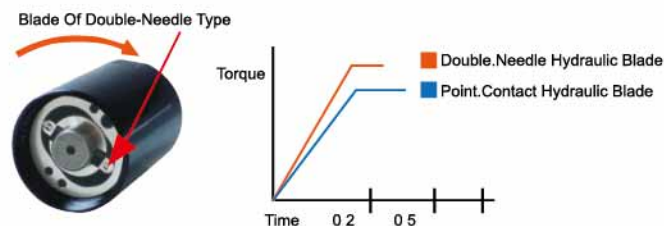


According to the raising rate of the torque and the stability of the shut off model tool, the double -needle type blade can quickly reveal the in time accuracy whatever in a high-pressure or low pressure condition.

Low Oil Mist

With self-lubricating blades and cylinder, we reduce the problem of lubricating oil and oil mist.

Tool Head Type: Touch Pin Type & Through Pin Type

Tool head is square. Head has touch type and through pin type for choosing (We normally provide touch pin type if you don't specify any type.)



Through-pin type:

It use through-pin and o-ring to fix socket.
It use for changing socket infrequently (Optional accessories)
O-ring and through pin are packaged in the box.



Touch-pin type: (Optional)

It use touch-pin to fix socket. It use for changing socket frequently.
The spring and touch-pin are already installed on tool when export.

Shut-Off Pistol Type Air Impulse Wrenches/ Screwdrivers (High-Pressure Tools)

自動斷氣式槍型油壓脈衝工具 / 螺絲起子 (高壓工具)

AOB40P-W 3/8" (4 - 12 Nm / 4,000 RPM) ★★★

AOB50P-W 3/8" (7 - 16 Nm / 4,500 RPM)

AOB60P-W 3/8" (16 - 32 Nm / 6,000 RPM)

AOB70P-W 3/8" (30 - 50 Nm / 6,000 RPM)

AOB80P-W 3/8" (40 - 65 Nm / 5,800 RPM)

**Pistol Shut-Off
Impulse Wrench
(High-Pressure Tools)**



AOB81P-W 1/2" (40 - 65 Nm / 5,800 RPM) ★★★

AOB90P-W 1/2" (42 - 85 Nm / 5,000 RPM)

AOB100P-W 1/2" (75 - 130 Nm / 4,500 RPM)

AOB130P-W 1/2" (110 - 150 Nm / 4,500 RPM)

**Pistol Shut-Off
Impulse Wrench
(High-Pressure Tools)**



AOB150P-W 3/4" (130 - 210 Nm / 3,900 RPM) ★★★

AOB180P-W 3/4" (165 - 260 Nm / 3,000 RPM)

**Pistol Shut-Off
Impulse Wrench
(High-Pressure Tools)**



AOB250P-W 3/4" (250 - 450 Nm / 3,600 RPM) ★★★

**Pistol Shut-Off
Impulse Wrench
(High-Pressure Tools)**



AOB40P-S 1/4" (4 - 12 Nm / 4,000 RPM) ★★★

AOB50P-S 1/4" (7 - 16 Nm / 4,500 RPM)

AOB60P-S 1/4" (14 - 30 Nm / 6,000 RPM)

**Pisto Shut-Off
Impulse Screwdriver
(High-Pressure Tools)**



AOB70P-S 1/4" (22 - 35 Nm / 6,000 RPM) ★★★

AOB80P-S 1/4" (30 - 42 Nm / 6,800 RPM)

**Pisto Shut-Off
Impulse Screwdriver
(High-Pressure Tools)**



Model No.	Bolt Capacity	Torque Range	Sq.Drive / Hex.Size	Free Speed (無負載轉速)			Length	Weight	Air Inlet	Air Hose	Air Cons.	Noise Level
	螺栓直徑	5-6 Bar		RPM			長度	重量	進氣口	氣管	耗氣量	噪音值
	mm	Nm	Inch	4bar(58psi)	5bar(73psi)	6bar(87psi)	mm	Kg	PT	mm	m³/min	db(A)
Shut-Off Pistol Type Air Impulse Wrenches (Applicable Air Pressure 5-6 Bar)												
AOB40P-W	5	4 - 12	3/8	-	3,700	4,000	160.5	0.92	1/4"	6.5	0.20	75
AOB50P-W	5 - 6	7 - 16	3/8	-	4,200	4,500	160.5	0.92	1/4"	6.5	0.25	78
AOB60P-W	8	16 - 32	3/8	-	5,700	6,000	170.0	0.95	1/4"	6.5	0.35	80
AOB70P-W	8 - 10	30 - 50	3/8	-	5,700	6,000	183.0	1.05	1/4"	8.0	0.40	80
AOB80P-W	8 - 10	40 - 65	3/8	-	5,500	5,800	187.0	1.25	1/4"	8.0	0.48	80
AOB81P-W	10	40 - 65	1/2	-	5,500	5,800	192.0	1.25	1/4"	8.0	0.48	80
AOB90P-W	10 - 12	42 - 85	1/2	-	4,700	5,000	192.0	1.45	1/4"	8.0	0.53	82
AOB100P-W	12	75 - 130	1/2	-	4,200	4,500	198.0	1.70	1/4"	8.0	0.55	82
AOB130P-W	12 - 14	110 - 150	1/2	-	4,200	4,500	215.0	2.30	1/4"	12.7	0.70	82
AOB150P-W	14 - 16	130 - 210	3/4	-	3,600	3,900	243.5	2.90	1/4"	12.7	0.70	82
AOB180P-W	16 - 18	165 - 260	3/4	-	2,800	3,000	262.0	3.70	3/8"	12.7	0.70	82
AOB250P-W	16 - 20	250 - 450	3/4	-	-	3,600	221.0	4.20	3/8"	13.0	1.40	85
Shut-Off Pistol Type Air Impulse Screwdrivers (Applicable Air Pressure 5-6 Bar)												
AOB40P-S	5	4 - 12	1/4	-	3,700	4,000	161.0	0.92	1/4"	6.5	0.20	75
AOB50P-S	5 - 6	7 - 16	1/4	-	4,200	4,500	161.0	0.92	1/4"	6.5	0.25	78
AOB60P-S	6 - 8	14 - 30	1/4	-	5,700	6,000	171.0	0.95	1/4"	6.5	0.35	80
AOB70P-S	8	22 - 35	1/4	-	5,700	6,000	183.0	1.05	1/4"	8.0	0.40	80
AOB80P-S	8 - 10	30 - 42	1/4	-	6,500	6,800	191.0	1.26	1/4"	8.0	0.48	80

Shut-Off Pistol Type Air Impulse Wrenches / Screwdrivers (Low-Pressure Tools)

自動斷氣式槍型油壓脈衝工具 / 螺絲起子 (低壓工具)



AOB50PL-W 3/8" (7 - 16 Nm / 4,200 RPM) ★ ★ ★
AOB60PL-W 3/8" (14 - 32 Nm / 5,700 RPM)
AOB70PL-W 3/8" (25 - 45 Nm / 5,700 RPM)
AOB80PL-W 3/8" (35 - 55 Nm / 5,600 RPM)

Pisto Shut-Off
Impulse Wrench
(Low-Pressure Tools)



AOB81PL-W 1/2" (35 - 58 Nm / 5,600 RPM) ★ ★ ★
AOB90PL-W 1/2" (40 - 80 Nm / 4,700 RPM)
AOB100PL-W 1/2" (65 - 105 Nm / 4,200 RPM)
AOB130PL-W 1/2" (85 - 120 Nm / 4,200 RPM)

Pisto Shut-Off
Impulse Wrench
(Low-Pressure Tools)



AOB150PL-W 3/4" (105 - 165 Nm / 3,800 RPM) ★ ★ ★

Pisto Shut-Off
Impulse Wrench
(Low-Pressure Tools)



AOB180PL-W 3/4" (125 - 205 Nm / 2,800 RPM) ★ ★ ★

Pisto Shut-Off
Impulse Wrench
(Low-Pressure Tools)



AOB50PL-S 1/4" (7 - 16 Nm / 4,200 RPM) ★ ★ ★
AOB60PL-S 1/4" (10 - 24 Nm / 5,700 RPM)

Pisto Shut-Off
Impulse Screwdriver
(Low-Pressure Tools)



AOB70PL-S 1/4" (14 - 30 Nm / 5,600 RPM) ★ ★ ★
AOB80PL-S 1/4" (25 - 40 Nm / 5,600 RPM)

Pisto Shut-Off
Impulse Screwdriver
(Low-Pressure Tools)



Model No.	Bolt Capacity	Torque Range	Sq. Drive / Hex. Size	Free Speed (無負載轉速)			Length	Weight	Air Inlet	Air Hose	Air Cons.	Noise Level
	螺栓直徑	5-6 Bar		RPM			長度	重量	進氣口	氣管	耗氣量	噪音值
	mm	Nm	Inch	4bar(58psi)	5bar(73psi)	6bar(87psi)	mm	Kg	PT	mm	m³/min	db(A)
Shut-Off Pistol Type Air Impulse Wrenches												
AOB50PL-W	5 - 6	7 - 16	3/8	3,900	4,200	-	160.5	0.92	1/4"	6.5	0.20	75
AOB60PL-W	8	14 - 32	3/8	5,400	5,700	-	170.0	0.95	1/4"	6.5	0.25	77
AOB70PL-W	8 - 10	25 - 45	3/8	5,400	5,700	-	183.0	1.05	1/4"	8.0	0.30	78
AOB80PL-W	8 - 10	35 - 55	3/8	5,300	5,600	-	187.0	1.25	1/4"	8.0	0.40	78
AOB81PL-W	10	35 - 58	1/2	5,300	5,600	-	192.0	1.25	1/4"	8.0	0.40	78
AOB90PL-W	10	40 - 80	1/2	4,400	4,700	-	192.0	1.45	1/4"	8.0	0.45	79
AOB100PL-W	10 - 12	65 - 105	1/2	3,900	4,200	-	198.0	1.70	1/4"	8.0	0.48	79
AOB130PL-W	12	85 - 120	1/2	3,900	4,200	-	215.0	2.30	1/4"	12.7	0.50	79
AOB150PL-W	12 - 14	105 - 165	3/4	3,600	3,800	-	243.5	2.90	1/4"	12.7	0.50	79
AOB180PL-W	14 - 16	125 - 205	3/4	2,600	2,800	-	262.0	3.70	3/8"	12.7	0.50	80
Shut-Off Pistol Type Air Impulse Screwdrivers												
AOB50PL-S	5 - 6	7 - 16	1/4	3,900	4,200	-	161.0	0.92	1/4"	6.5	0.20	75
AOB60PL-S	6 - 8	10 - 24	1/4	5,400	5,700	-	171.0	0.95	1/4"	6.5	0.25	77
AOB70PL-S	8	14 - 30	1/4	5,300	5,600	-	183.0	1.05	1/4"	8.0	0.40	77
AOB80PL-S	8 - 10	25 - 40	1/4	5,300	5,600	-	191.0	1.26	1/4"	8.0	0.48	80

Shut-Off Straight Type Air Impulse Wrenches/ Screwdrivers (High-Pressure & Low-Pressure Tools)

自動斷氣式直型油壓脈衝工具 / 螺絲起子(高壓 & 低壓工具)

AOB40S-W 3/8" (4 - 12 Nm / 5,000 RPM) ★ ★ ★

AOB50S-W 3/8" (7 - 16 Nm / 6,000 RPM)

AOB60S-W 3/8" (16 - 35 Nm / 6,200 RPM)

AOB70S-W 3/8" (30 - 48 Nm / 5,800 RPM)

AOB80S-W 3/8" (35 - 60 Nm / 6,500 RPM)

**Straight Shut-Off Impulse Wrench
(High-Pressure Tools)**



AOB50SL-W 3/8" (7 - 16 Nm / 4,700 RPM) ★ ★ ★

AOB60SL-W 3/8" (14 - 28 Nm / 5,700 RPM)

AOB70SL-W 3/8" (20 - 40 Nm / 5,600 RPM)

AOB80SL-W 3/8" (35 - 55 Nm / 5,600 RPM)

**Straight Shut-Off Impulse Wrench
(Low-Pressure Tools)**



AOB81S-W 1/2" (35 - 60 Nm / 6,500 RPM) ★ ★ ★

**Straight Shut-Off Impulse Wrench
(High-Pressure Tools)**



AOB81SL-W 1/2" (40 - 60 Nm / 5,600 RPM) ★ ★ ★

**Straight Shut-Off Impulse Wrench
(Low-Pressure Tools)**



AOB40S-S 1/4" (4 - 12 Nm / 5,000 RPM) ★ ★ ★

AOB50S-S 1/4" (7 - 16 Nm / 6,000 RPM)

AOB60S-S 1/4" (16 - 28 Nm / 6,000 RPM)

AOB70S-S 1/4" (20 - 32 Nm / 5,800 RPM)

AOB80S-S 1/4" (30 - 42 Nm / 6,800 RPM)

**Straight Shut-Off Impulse Screwdriver
(High-Pressure Tools)**



AOB30SL-S 1/4" (3 - 6 Nm / 6,000 RPM) ★ ★ ★

AOB50SL-S 1/4" (7 - 16 Nm / 4,700 RPM)

AOB60SL-S 1/4" (14 - 26 Nm / 5,700 RPM)

AOB70SL-S 1/4" (20 - 30 Nm / 5,600 RPM)

AOB80SL-S 1/4" (28 - 38 Nm / 6,300 RPM)

**Straight Shut-Off Impulse Screwdriver
(Low-Pressure Tools)**



Model No.	Bolt Capacity	Torque Range	Sq. Drive / Hex. Size	Free Speed (無負載轉速)			Length	Weight	Air Inlet	Air Hose	Air Cons.	Noise Level
	螺栓直徑	5-6 Bar		RPM			長度	重量	進氣口	氣管	耗氣量	噪音值
	mm	Nm	Inch	4bar(58psi)	5bar(73psi)	6bar(87psi)	mm	Kg	PT	mm	m³/min	db(A)
High Pressure Tools Air Impulse Wrenches (Applicable Air Pressure 5-6 Bar)												
AOB40S-W	5	4 - 12	3/8	-	4,700	5,000	218.0	0.83	1/4"	6.5	0.20	70
AOB50S-W	5 - 6	7 - 16	3/8	-	5,600	6,000	218.0	0.83	1/4"	6.5	0.25	78
AOB60S-W	8	16 - 35	3/8	-	5,800	6,200	228.0	0.87	1/4"	6.5	0.30	80
AOB70S-W	8 - 10	30 - 48	3/8	-	5,400	5,800	240.5	0.95	1/4"	8.0	0.35	80
AOB80S-W	8 - 10	35 - 60	3/8	-	6,100	6,500	246.5	1.20	1/4"	8.0	0.48	80
AOB81S-W	10	35 - 60	1/2	-	6,100	6,500	251.5	1.25	1/4"	8.0	0.48	80
Low Pressure Tools Air Impulse Wrenches (Applicable Air Pressure 4-5 Bar)												
AOB50SL-W	5 - 6	7 - 16	3/8	-	4,700	-	218.0	0.83	1/4"	6.5	0.20	75
AOB60SL-W	8	14 - 28	3/8	-	5,700	-	228.0	0.87	1/4"	6.5	0.25	77
AOB70SL-W	8 - 10	20 - 40	3/8	-	5,600	-	240.5	0.95	1/4"	8.0	0.27	78
AOB80SL-W	8 - 10	35 - 55	3/8	-	5,600	-	246.5	1.20	1/4"	8.0	0.40	78
AOB81SL-W	10	40 - 60	1/2	-	5,600	-	251.5	1.25	1/4"	8.0	0.40	78
High Pressure Tools Air Impulse Screwdrivers (Applicable Air Pressure 5-6 Bar)												
AOB40S-S	5	4 - 12	1/4	-	4,700	5,000	220.5	0.83	1/4"	6.5	0.20	70
AOB50S-S	5 - 6	7 - 16	1/4	-	5,600	6,000	220.5	0.83	1/4"	6.5	0.25	78
AOB60S-S	6 - 8	16 - 28	1/4	-	-	6,000	230.5	0.87	1/4"	6.5	0.30	80
AOB70S-S	8	20 - 32	1/4	-	-	5,800	240.5	0.95	1/4"	8.0	0.40	80
AOB80S-S	8 - 10	30 - 42	1/4	-	6,500	6,800	250.0	1.25	1/4"	8.0	0.48	80
Low Pressure Tools Air Impulse Screwdrivers (Applicable Air Pressure 0.4-0.5 MPa)												
AOB30SL-S	4 - 5	3 - 6	1/4	5,600	5,800	6,000	219.0	0.72	1/4"	5.0	0.20	65
AOB50SL-S	5 - 6	7 - 16	1/4	-	4,700	-	220.5	0.83	1/4"	6.5	0.20	75
AOB60SL-S	6 - 8	14 - 26	1/4	-	5,700	-	230.5	0.87	1/4"	6.5	0.20	77
AOB70SL-S	8	20 - 30	1/4	-	5,600	-	240.5	0.95	1/4"	8.0	0.25	77
AOB80SL-S	8 - 10	28 - 38	1/4	5,900	6,300	-	250.0	1.25	1/4"	8.0	0.48	80

Shut-Off Angle Type Impulse Wrenches/ Screwdrivers (High-Pressure & Low-Pressure Tools)

自動斷氣式彎頭型油壓脈衝工具 / 螺絲起子 (高壓 & 低壓工具)



AOB-50SC-W	3/8" (7 - 15 Nm / 4,700 RPM) ★ ★ ★
AOB-60SC-W	3/8" (13 - 28 Nm / 5,800 RPM)
AOB-70SC-W	3/8" (27 - 45 Nm / 4,200 RPM)
AOB-70SC-W1	1/2" (30 - 50 Nm / 4,200 RPM)
AOB-75SC-W	1/2" (26 - 50 Nm / 4,000 RPM)
AOB-80SC-W1	1/2" (45 - 65 Nm / 4,400 RPM)
AOB-80SC-W	1/2" (48 - 68 Nm / 4,500 RPM)

**Angle Shut-Off Impulse Wrench
(High-Pressure Tools)**



AOB-50SCL-W	3/8" (7 - 14 Nm / 4,500 RPM)
AOB-60SCL-W	3/8" (10 - 25 Nm / 5,200 RPM)
AOB-70SCL-W	3/8" (30 - 40 Nm / 4,200 RPM)
AOB-70SCL-W1	1/2" (28 - 45 Nm / 4,200 RPM)
AOB-75SCL-W	1/2" (40 - 50 Nm / 4,300 RPM)
AOB-80SCL-W1	1/2" (42 - 60 Nm / 4,500 RPM)
AOB-80SCL-W	1/2" (30 - 60 Nm / 3,000 RPM)

**Angle Shut-Off Impulse Wrench
(Low-Pressure Tools)**




AOB-50SC-S	1/4" (13 - 18 Nm / 4,700 RPM) ★ ★ ★
AOB-60SC-S	1/4" (16 - 23 Nm / 5,800 RPM)
AOB-70SC-S	1/4" (18 - 25 Nm / 5,300 RPM)

**Angle Shut-Off Impulse Screwdriver
(High-Pressure Tools)**



AOB-50SCL-S	1/4" (6 - 12 Nm / 5,700 RPM)
AOB-60SCL-S	1/4" (8 - 15 Nm / 6,200 RPM)
AOB-70SCL-S	1/4" (11 - 22 Nm / 6,100 RPM)

**Angle Shut-Off Impulse Screwdriver
(Low-Pressure Tools)**

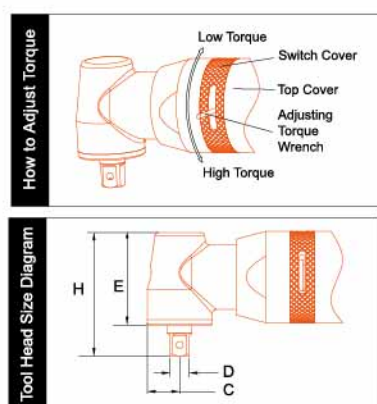

Model No.	C		H		D		E	
	mm	inch	mm	inch	mm	inch	mm	inch
50/60 Series 3/8" Dr.	16.0	5/8	61	2-3/8	9.5	3/8	46	1-4/5
50/ 60/ 70 Series 1/4" Dr.	16.0	5/8	62	2-2/5	9.5	3/8	46	1-4/5
AOB-80SC	22.5	7/8	78	3-1/8	12.7	1/2	58	2-3/10
AOB-70SC	18.0	7/10	70	2-3/4	9.5	3/8	54.5	2-3/20
AOB-70SC-1								
AOB-75SC	18.0	7/10	75	3	12.7	1/2	54.5	2-3/20
AOB-80SC-1								

Model No.	Bolt Capacity	Torque Range	Sq. Drive / Hex. Size	Free Speed (無負載轉速)			Length	Weight	Air Inlet	Air Hose	Air Cons.	Vibration	Noise Level
	螺栓直徑	5-6 Bar		RPM			長度	重量	進氣口	氣管	耗氣量	震動值	噪音值
	mm	Nm	Inch	4bar(58psi)	5bar(73psi)	6bar(87psi)	mm	Kg	PT	mm	m³/min	m/sec²	db(A)
High Pressure Tools Angle Type Air Impulse Wrenches (Applicable Air Pressure 5-6 Bar)													
AOB-50SC-W	5 - 6	7 - 15	3/8	-	4,500	4,700	258.0	1.28	1/4"	6.5	0.25	2.3	75
AOB-60SC-W	6 - 8	13 - 28	3/8	-	5,500	5,800	270.0	1.35	1/4"	6.5	0.30	2.5	75
AOB-70SC-W	8 - 10	27 - 45	3/8	-	3,900	4,200	289.0	1.63	1/4"	8.0	0.35	2.5	78
AOB-70SC-W1	8	30 - 50	1/2	-	3,900	4,200	289.0	1.64	1/4"	8.0	0.35	2.5	78
AOB-75SC-W	10	26 - 50	1/2	-	3,800	4,000	290.0	1.83	1/4"	8.0	0.35	2.5	78
AOB-80SC-W1	10	45 - 65	1/2	-	4,200	4,400	295.0	2.00	1/4"	8.0	0.35	2.5	80
AOB-80SC-W	10	48 - 68	1/2	-	4,300	4,500	295.0	2.00	1/4"	8.0	0.35	2.5	80
Low Pressure Tools Angle Type Air Impulse Wrenches (Applicable Air Pressure 4-5 Bar)													
AOB-50SCL-W	6 - 8	7 - 14	3/8	-	4,500	-	258.0	1.35	1/4"	6.5	0.20	2.3	75
AOB-60SCL-W	8	10 - 25	3/8	-	5,200	-	270.0	1.45	1/4"	6.5	0.25	2.5	75
AOB-70SCL-W	8	30 - 40	3/8	-	4,000	4,200	289.0	1.64	1/4"	8.0	0.27	2.5	75
AOB-70SCL-W1	8	28 - 45	1/2	-	3,900	4,200	289.0	1.64	1/4"	8.0	0.27	2.5	78
AOB-75SCL-W	8 - 10	40 - 50	1/2	-	4,000	4,300	290.0	1.83	1/4"	8.0	0.27	2.5	75
AOB-80SCL-W1	8 - 10	42 - 60	1/2	-	4,300	4,500	295.0	2.00	1/4"	8.0	0.27	2.5	75
AOB-80SCL-W	10	30 - 60	1/2	-	3,000	-	305.5	2.12	1/4"	8.0	0.27	2.5	75
High Pressure Tools Angle Type Air Impulse Screwdrivers (Applicable Air Pressure 4-5 Bar)													
AOB-50SC-S	5 - 6	13 - 18	1/4	-	4,500	4,700	259.0	1.27	1/4"	6.5	0.25	2.3	75
AOB-60SC-S	6 - 8	16 - 23	1/4	-	5,500	5,800	270.0	1.32	1/4"	6.5	0.30	2.5	75
AOB-70SC-S	8	18 - 25	1/4	-	5,000	5,300	281.0	1.42	1/4"	6.5	0.35	2.5	78
Low Pressure Tools Angle Type Air Impulse Screwdrivers (Applicable Air Pressure 4-5 Bar)													
AOB-50SCL-S	5 - 6	6 - 12	1/4	-	5,500	5,700	259.0	1.27	1/4"	6.5	0.20	2.3	75
AOB-60SCL-S	6	8 - 15	1/4	-	5,800	6,200	270.0	1.32	1/4"	6.5	0.25	2.5	75
AOB-70SCL-S	8	11 - 22	1/4	-	5,900	6,100	281.0	1.42	1/4"	6.5	0.27	2.5	75

Non Shut-Off Pistol Type Air Impulse Wrenches / Screwdrivers

失速式槍型油壓脈衝工具 / 螺絲起子

★★★
AOBN-30P-W 3/8" (6 - 12 Nm / 4,000 RPM)
AOBN-40P-W 3/8" (13 - 22 Nm / 4,000 RPM)
AOBN-50P-W 3/8" (20 - 35 Nm / 7,000 RPM)
AOBN-60P-W 3/8" (35 - 50 Nm / 6,500 RPM)
AOBN-70P-W 3/8" (40 - 60 Nm / 6,000 RPM)
AOBN-80P-W 3/8" (40 - 70 Nm / 5,600 RPM)

Pistol Non Shut-Off
Impulse Wrench



★★★
AOBN-81P-W 1/2" (50 - 80 Nm / 5,600 RPM)
AOBN-90P-W 1/2" (80 - 100 Nm / 5,200 RPM)
AOBN-100P-W 1/2" (90 - 125 Nm / 4,600 RPM)
AOBN-130P-W 1/2" (100 - 155 Nm / 4,000 RPM)

Pistol Non Shut-Off
Impulse Wrench



★★★
AOBN-150P-W 3/4" (150 - 230 Nm / 3,400 RPM)
AOBN-180P-W 3/4" (220 - 300 Nm / 3,200 RPM)

Pistol Non Shut-Off
Impulse Wrench



★★★
AOBN-30P-S 1/4" (6 - 12 Nm / 3,800 RPM)
AOBN-40P-S 1/4" (10 - 20 Nm / 3,800 RPM)
AOBN-50P-S 1/4" (18 - 30 Nm / 6,200 RPM)
AOBN-60P-S 1/4" (25 - 35 Nm / 6,500 RPM)
AOBN-70P-S 1/4" (35 - 45 Nm / 6,700 RPM)
AOBN-80P-S 1/4" (45 - 60 Nm / 6,800 RPM)

Pisto Type Non Shut-Off
Impulse Screwdriver



Model No.	Bolt Capacity	Torque Range	Sq. Drive / Hex. Size	Free Speed (無負載轉速)			Length	Weight	Air Inlet	Air Hose	Air Cons.	Vibration	Noise Level
	螺栓直徑	5-6 Bar		RPM			長度	重量	進氣口	氣管	耗氣量	震動值	噪音值
	mm	Nm	Inch	4bar(58psi)	5bar(73psi)	6bar(87psi)	mm	Kg	PT	mm	m³/min	m/sec²	db(A)
Pistol Type Air Impulse Wrenches (Applicable Air Pressure 5-6 Bar)													
AOBN-30P-W	5 - 6	6 - 12	3/8	-	-	4,000	131.0	0.70	1/4"	6.5	0.20	2.3	75
AOBN-40P-W	6	13 - 22	3/8	-	-	4,000	131.0	0.70	1/4"	6.5	0.20	2.3	75
AOBN-50P-W	6 - 8	20 - 35	3/8	-	-	7,000	134.0	0.77	1/4"	6.5	0.25	2.5	78
AOBN-60P-W	8 - 10	35 - 50	3/8	-	-	6,500	141.0	0.82	1/4"	6.5	0.40	2.5	80
AOBN-70P-W	10	40 - 60	3/8	-	-	6,000	155.0	0.95	1/4"	8.0	0.45	2.5	80
AOBN-80P-W	10	40 - 70	3/8	-	-	5,600	161.5	1.15	1/4"	8.0	0.48	2.5	80
AOBN-81P-W	10 - 12	50 - 80	1/2	-	-	5,600	166.5	1.17	1/4"	8.0	0.48	2.5	80
AOBN-90P-W	12	80 - 100	1/2	-	-	5,200	165.0	1.30	1/4"	8.0	0.53	2.5	82
AOBN-100P-W	12 - 14	90 - 125	1/2	-	-	4,600	172.0	1.66	1/4"	8.0	0.58	2.6	80
AOBN-130P-W	14	100 - 155	1/2	-	-	4,000	185.0	2.30	1/4"	12.7	0.65	2.9	82
AOBN-150P-W	14 - 16	150 - 230	3/4	-	-	3,400	213.5	2.50	1/4"	12.7	0.70	3.2	82
AOBN-180P-W	16 - 18	220 - 300	3/4	-	-	3,200	226.5	3.00	3/8"	12.7	0.70	3.2	82
Pistol Type Air Impulse Screwdrivers (Applicable Air Pressure 5-6 Bar)													
AOBN-30P-S	5 - 6	6 - 12	1/4	-	-	3,800	131.0	0.70	1/4"	6.5	0.20	2.3	75
AOBN-40P-S	6	10 - 20	1/4	-	-	3,800	131.0	0.70	1/4"	6.5	0.20	2.3	75
AOBN-50P-S	6 - 8	18 - 30	1/4	-	-	6,200	134.0	0.77	1/4"	6.5	0.25	2.5	78
AOBN-60P-S	8	25 - 35	1/4	-	-	6,500	142.0	0.82	1/4"	8.0	0.40	2.5	80
AOBN-70P-S	8 - 10	35 - 45	1/4	-	-	6,700	155.0	0.95	1/4"	8.0	0.45	2.5	80
AOBN-80P-S	8 - 10	45 - 60	1/4	-	6,500	6,800	170.0	1.18	1/4"	8.0	0.48	2.5	80

Non Shut-Off Straight Type Air Impulse Wrenches / Screwdrivers

失速式直型油壓脈衝工具 / 螺絲起子



★★★★
AOBN-40S-W 3/8" (13 - 22 Nm / 4,000 RPM)
AOBN-50S-W 3/8" (20 - 35 Nm / 6,700 RPM)
AOBN-60S-W 3/8" (32 - 50 Nm / 6,500 RPM)
AOBN-70S-W 3/8" (40 - 60 Nm / 6,000 RPM)
AOBN-80S-W 3/8" (40 - 70 Nm / 5,800 RPM)

Straight Non Shut-Off Impulse Wrench



★★★★
AOBN-30S-S 1/4" (5 - 10 Nm / 6,000 RPM)

Straight Non Shut-Off Impulse Screwdriver



★★★★
AOBN-81S-W 1/2" (50 - 80 Nm / 5,800 RPM)

Straight Non Shut-Off Impulse Wrench



★★★★
AOBN-40S-S 1/4" (11 - 20 Nm / 4,000 RPM)
AOBN-50S-S 1/4" (18 - 28 Nm / 6,700 RPM)
AOBN-60S-S 1/4" (22 - 35 Nm / 6,500 RPM)
AOBN-70S-S 1/4" (25 - 40 Nm / 6,000 RPM)
AOBN-80S-S 1/4" (45 - 60 Nm / 6,800 RPM)

Straight Non Shut-Off Impulse Screwdriver



Model No.	Bolt Capacity	Torque Range	Sq. Drive / Hex. Size	Free Speed (無負載轉速)			Length	Weight	Air Inlet	Air Hose	Air Cons.	Vibration	Noise Level
	螺栓直徑	5-6 Bar		RPM			長度	重量	進氣口	氣管	耗氣量	震動值	噪音值
	mm	Nm	Inch	4bar (58psi)	5bar (73psi)	6bar (87psi)	mm	Kg	PT	mm	m³/min	m/sec²	db(A)

Straight Type Air Impulse Wrenches (Applicable Air Pressure 5-6 Bar)

AOBN-40S-W	5 - 6	13 - 22	3/8	-	-	4,000	218.0	0.62	1/4"	6.5	0.23	2.3	75
AOBN-50S-W	6 - 8	20 - 35	3/8	-	-	6,700	218.0	0.74	1/4"	6.5	0.35	2.3	78
AOBN-60S-W	8 - 10	32 - 50	3/8	-	-	6,500	228.0	0.77	1/4"	6.5	0.45	2.5	80
AOBN-70S-W	10	40 - 60	3/8	-	-	6,000	240.5	0.87	1/4"	8.0	0.45	2.5	84
AOBN-80S-W	10	40 - 70	3/8	-	-	5,800	246.5	1.20	1/4"	8.0	0.48	2.5	80
AOBN-81S-W	10 - 12	50 - 80	1/2	-	-	5,800	251.5	1.25	1/4"	8.0	0.48	2.5	80

Straight Type Air Impulse Screwdrivers (Applicable Air Pressure 5-6 Bar)

AOBN-30S-S	5	5 - 10	1/4	5,600	5,800	6,000	219.0	0.72	1/4"	5.0	0.20	2.1	65
AOBN-40S-S	5 - 6	11 - 20	1/4	-	-	4,000	220.5	0.62	1/4"	6.5	0.23	2.3	75
AOBN-50S-S	6 - 8	18 - 28	1/4	-	-	6,700	220.5	0.74	1/4"	6.5	0.35	2.3	78
AOBN-60S-S	8	22 - 35	1/4	-	-	6,500	230.5	0.77	1/4"	6.5	0.45	2.5	80
AOBN-70S-S	8 - 10	25 - 40	1/4	-	-	6,000	240.5	0.87	1/4"	8.0	0.45	2.5	80
AOBN-80S-S	8 - 10	45 - 60	1/4	-	6,500	6,800	250.0	1.24	1/4"	8.0	0.48	2.5	80

Non Shut-Off Angle Type Impulse Wrenches / Screwdrivers

失速式彎頭型油壓脈衝工具 / 螺絲起子

★★★

Angle Non Shut-Off Impulse Wrench

AOBN-50SC-W 3/8"

- 15 - 20 Nm / 4,800 RPM

AOBN-60SC-W 3/8"

- 18 - 30 Nm / 6,000 RPM

AOBN-70SC-W 3/8"

- 40 - 55 Nm / 4,000 RPM

★★★

Angle Non Shut-Off Impulse Wrench

AOBN-70SC-W1 1/2"

- 45 - 60 Nm / 4,000 RPM

AOBN-75SC-W 1/2"

- 50 - 70 Nm / 3,800 RPM

AOBN-80SC-W 1/2"

- 60 - 85 Nm / 3,200 RPM

AOBN-80SC-W1 1/2"

- 55 - 80 Nm / 5,000 RPM

★★★

Angle Non Shut-Off Impulse Screwdriver

AOBN-50SC-S 1/4"



- 10 - 18 Nm / 4,800 RPM

AOBN-60SC-S 1/4"

- 17 - 24 Nm / 5,900 RPM

AOBN-70SC-S 1/4"

- 18 - 29 Nm / 5,300 RPM

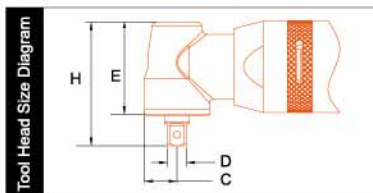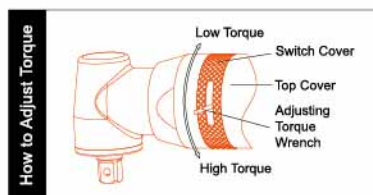

Model No.	C		H		D		E	
	mm	inch	mm	inch	mm	inch	mm	inch
AOBN-80SC	22.5	7/8	78	3-1/8	12.7	1/2	58	2-3/10
AOBN-70SC	18.0	7/10	70	2-3/4	9.5	3/8	54.5	2-3/20
AOBN-70SC-1	18.0	7/10	75	3	12.7	1/2	54.5	2-3/20
AOBN-75SC								
AOBN-80SC-1								

Model No.	Bolt Capacity	Torque Range	Sq. Drive / Hex. Size	Free Speed (無負載轉速)			Length	Weight	Air Inlet	Air Hose	Air Cons.	Vibration	Noise Level
	螺栓直徑	5-6 Bar		RPM			長度	重量	進氣口	氣管	耗氣量	震動值	噪音值
	mm	Nm	Inch	4bar (58psi)	5bar (73psi)	6bar (87psi)	mm	Kg	PT	mm	m³/min	m/sec²	db(A)

Non-Shut Off Angle Type Air Impulse Wrenches (Applicable Air Pressure 5-6 Bar)

AOBN-50SC-W	6 - 8	15 - 20	3/8	-	4,600	4,800	261.5	1.35	1/4"	6.5	0.40	2.3	75
AOBN-60SC-W	8	18 - 30	3/8	-	5,700	6,000	269.5	1.45	1/4"	6.5	0.43	2.5	75
AOBN-70SC-W	8 - 10	40 - 55	3/8	-	3,900	4,000	285.0	1.60	1/4"	8.0	0.45	2.5	78
AOBN-70SC-W1	8 - 10	45 - 60	1/2	-	3,600	4,000	285.0	1.62	1/4"	8.0	0.45	2.5	78
AOBN-75SC-W	10	50 - 70	1/2	-	3,400	3,800	290.0	1.82	1/4"	8.0	0.45	2.5	78
AOBN-80SC-W	10 - 12	60 - 85	1/2	-	-	3,200	305.5	1.85	1/4"	8.0	0.50	2.5	80
AOBN-80SC-W1	10	55 - 80	1/2	-	4,700	5,000	294.0	1.97	1/4"	8.0	0.50	2.5	78

Non-Shut Off Angle Type Air Impulse Screwdrivers (Applicable Air Pressure 5-6 Bar)

AOBN-50SC-S	6	10 - 18	1/4	-	4,600	4,800	256.0	1.22	1/4"	6.5	0.40	2.3	75
AOBN-60SC-S	6 - 8	17 - 24	1/4	-	5,500	5,900	264.0	1.26	1/4"	6.5	0.43	2.5	75
AOBN-70SC-S	8	18 - 29	1/4	-	5,500	5,300	277.0	1.40	1/4"	8.0	0.45	2.5	75



RDTP/ RDT Series

Torque Tester

Specifications:

- Transducer is from 500 to 5000 N.m to be supplied.
- Transducer accuracy is better than $\pm 3\%$.
- Indicator functions:
 - 1- Two display windows of the panel for torque with Limit Set or with Blows per Minute (B.P.M) and all show at the same time.
 - 2- Clockwise or Anti-clockwise testing is available.
 - 3- Also with a selective auto reset function.
 - 4- Available calibrated in various torque units as well an automatic conversion function are included. (N.m, lbf.ft, lbf.in, kgf.m, kgf.cm).
 - 5- The indicator works with different range of transducer, may also test the other type of power tools, such as: Oil Pulse-Shut off type, Oil Pulse-Non shut off type, Clutch type, torque wrench and Cordless Impact Type, jK and so on.
 - 6- Power Source: AC 110V~240V.



- It is suitable for detection all kinds of impact wrenches.
- It is available for the quality examination and the new product research development, specially is the best helper for the Production Department.
- It is convenient and accurate to use electric or dial wrench against the tested value.
- The certification report of transducer and management software are attached.
- The basic guarantee is 3 years for the instrument (included indicator and transducer).

Application: For Shut Off & Non-Shut Off (Pluse Type, Clutch Type, Impact Type, Torque Wrench Type, Cordless Impact Type).

Model	Square Driver	N.m	Ft-lb	In-lb	Kg-m	Kg-cm
RDTP-1	1/4"	0.5 - 10	0.37 - 7.38	4.43 - 88.5	0.05 - 1.02	5.1 - 102
RDTP-2	1/4", 3/8"	1.25 - 25	0.92 - 18.45	11.06 - 221.3	0.13 - 2.55	12.75 - 255
RDTP-3	1/4", 3/8"	2.5 - 50	1.85 - 36.9	22.13 - 442.6	0.255 - 5.1	25.5 - 510
RDTP-4	1/4", 3/8", 1/2"	5 - 100	3.69 - 73.8	44.25 - 885	0.51 - 10.2	51 - 1020
RDTP-5	1/4", 3/8", 1/2"	12.5 - 250	9.23 - 184.5	110.6 - 2212.8	1.28 - 25.5	127.5 - 2550
RDT-4	1/4", 3/8", 1/2"	25 - 500	18.45 - 369	221.3 - 4425.5	2.5 - 51	250 - 5100
RDT-5	3/8", 1/2"	100 - 1000	36.9 - 738	442.6 - 8851	5.1 - 102	510 - 10200
RDT-6	1/2", 3/4"	250 - 2500	184.5 - 1845	2212.8 - 22127.5	25.5 - 255	2550 - 25500
RDT-7	3/4", 1"	500 - 5000	369 - 3690	4425.5 - 44255	51 - 510	5100 - 51000
RDT-8	3/4", 1", 1-1/2"	1000-10000	738 - 7375	8851 - 88510	102 - 1020	10200 - 102000
RDT-9	3/8", 1/2", 3/4"	150-1500	110.7 - 1107	1327.7 - 13276.5	15.3 - 153	1530 - 15300
RDT-10	1/2"	150-1500	110.7 - 1107	1327.7 - 13276.5	15.3 - 153	1530 - 15300

Vacuum Pump Systems

抽真空系統

VP-150

Vacuum Oiling Machine

- Voltage: 220 V/ 50 HZ
- Power: 0.5 HP (373W)
- Air Cons.: 5 CFM



AT-150VT

Vacuum Tank



Parts For Maintenances

零件維修組

Hydraulic Cylinder Oil



Air Motor Lubricant



Repair Kit

- Only oil, o-ring, spring or washer need to be replaced to extend its lifetime.



AIRPRO INDUSTRY CORP.

Manufacture and Export of Professional Tools

 Tel No : 886-2-29504785  Fax No : 886-2-89533145

 Skype : airprotool

 E-mail: sales@airprotool.com / sales@airprowu.com

 www.airprotool.com

 Headquarters :
6F-2 No.158 Kancheng Rd.,Panchiao District,New Taipei City,
Taiwan 22061
Taichung Branch, Factory & Warehouse :
No.3-1, Qingguang Rd., Wuri Dist., Taichung City, Taiwan 41491

* Specifications and design may be changed without notice for improvement.

Copyright©2025 AIRPRO INDUSTRY CORP.

CAT25JA08300A

